

DATA SHEET

Metallic roofing tile

Wetterbest® Gladiator




The concept of the Gladiator profile combines the mechanical robustness of the Wetterbest® roofing systems with the elegance of the classic Mediterranean roofs, bringing to the fore the profile of ancient Roman type hollow tiles.

With a firm and dimensionally balanced geometry, the Wetterbest® Gladiator metallic roofing tile stands out for its increased safety against the action of environmental factors on the roof.

Ideal for covering the holiday homes, tourism projects etc.

Technical details

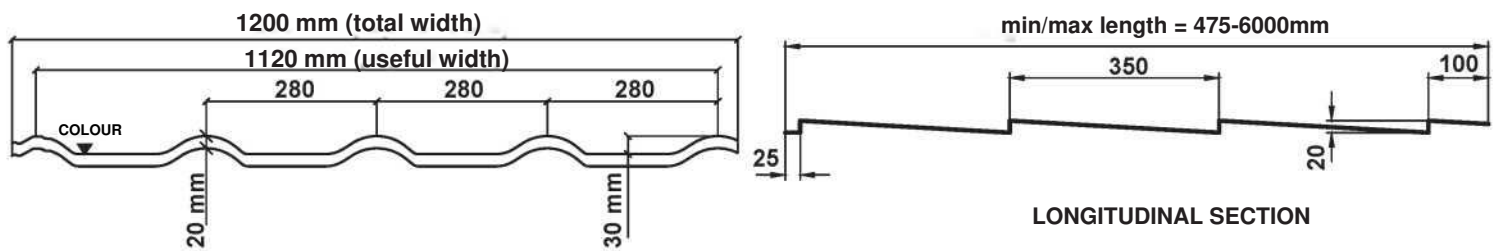

Total width	Total width	Roofing tile wave height	Step height	Laths distance	Minimum length	Maximum length	Minimum slope	Unit of sale
1200 mm	1120 mm	30 mm	20 mm	350 mm	475mm	6000 mm	140 (1:4)	m ²

Material specifications

PROJECTION TYPE	LUCIOS (GLOSSY)	MAT	NEOMAT 30	SUPREM 50
Specific weight (kg/m ²)	3.45/ 3.98/ 4.45	3.45/ 3.98/ 4.45	4.45	4.45
Material thickness (mm)	0.40/ 0.45/ 0.50	0.40/ 0.45/ 0.50	0.5	0.5
Warranty (corrosion/colour)	10 / 10 years	15 / 15 years	30/30 years	50/25 years

Materials

DIMENSIONAL TOLERANCES	REFERENCE	RAW MATERIAL	REFERENCE
Product	SR EN 508-1: 2014	Hot dip galvanised steel	SR EN 10346: 2015
Material	SR EN 10143: 2006	Organic coated steel	SR EN 10169: 2011 +A1 : 2012