

# DATA SHEET

## Metallic roofing tile


### Wetterbest® Plus



Wetterbest® Plus metallic roofing tile has a step height between modules of 30 mm, the highest on the market, which gives it increased strength and outstanding aesthetic value. Its appearance is strong, combined with an extremely elegant shape.

With a geometry reminiscent of traditional roofs and symmetry of longitudinal overlapping areas, with respect to the central axis, Wetterbest® Plus can be mounted on most roof shapes.

### Technical details

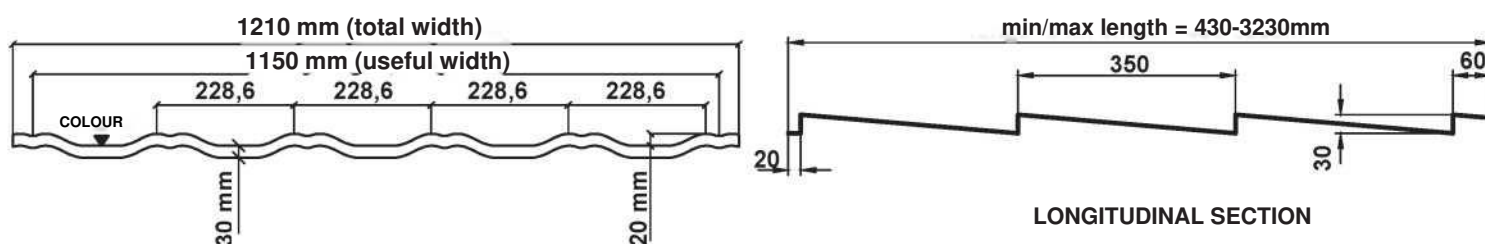

Total width	Useful width	Roofing tile wave height	Step height	Laths distance	Minimum length	Maximum length	Minimum slope	Unit of sale
1210 mm	1150 mm	30 mm	20 mm	350 mm	430mm	6000 mm	14° (1:4)	m <sup>2</sup>

### Material specifications

PROJECTION TYPE	LUCIOS (GLOSSY)	MAT	NEOMAT 30	SUPREM 50
Specific weight (kg/m <sup>2</sup> )	3.45/ 3.98/ 4.45	3.45/ 3.98/ 4.45	4.45	4.45
Material thickness (mm)	0.40/ 0.45/ 0.50	0.40/ 0.45/ 0.50	0.5	0.5
Warranty (corrosion/colour)	10 / 10 years	15 / 15 years	30/30 years	50/25 years

### Materials

DIMENSIONAL TOLERANCES	REFERENCE	RAW MATERIAL	REFERENCE
Product	SR EN 508-1:2014	Hot dip galvanised steel	SR EN 10346:2015
Material	SR EN 10143:2006	Organic coated steel	SR EN 10169:2011 +A1 : 2012



SC Wetterbest SA

str.Înfrățirii, nr. 142, Băicoi, Prahova, Romania  
Telephone:0244.268.633 | Mobile:0735.35.35.35

[www.wetterbest.ro](http://www.wetterbest.ro)